


Instructions for Updating the USB Port of the DMC-600/600SE, DAC-200ts or SI-300.2d for use with XMOS USBAudio Driver ver.3.40.0 for Windows 10


1. First download from the Cary Audio website, the XMOS USBAudio update files that contain both driver version (3.34.0 with the folder files, driver version 3.40.0 and the kehang_dfu.bin file). Once downloaded you will need to extract these files to an easy to get to folder on your hard drive.
2. If you don't already have driver v3.34.0 installed on your PC you will need to install this now.
3. Now connect your DMC-600/600SE, DAC200ts or SI-300.2d to your PC with a USB cable and press the Power button to power it on. Wait for it to fully boot up.
4. Open the TUSBAudio Control Panel (refer to picture 1) and check that the Device is available. (refer to picture 2)

Picture 1

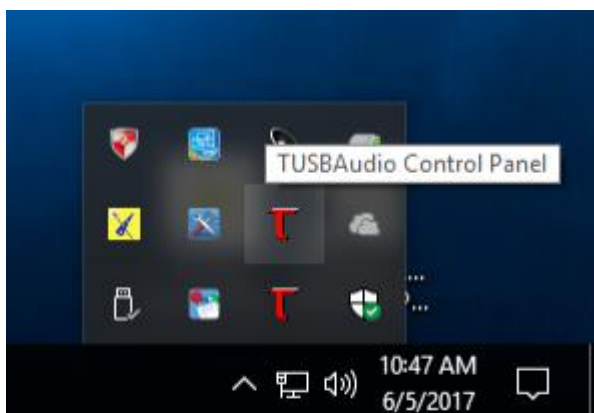

- Open the extracted Cary XMOS USBAudio v3.34.0 folder, now select and open TUSBAudioDfu (refer to picture 2).


Picture 2

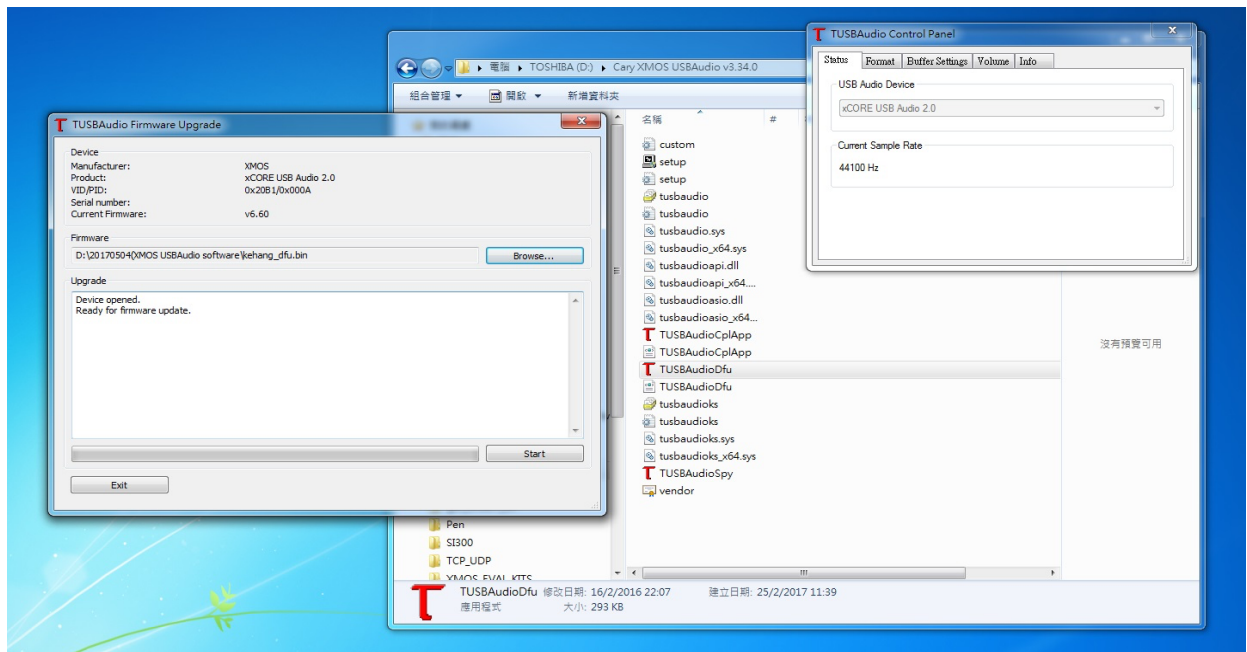

- Browse for and select "kehang_dfu.bin" in TUSBAudio Firmware Upgrade. (refer to picture 2)

7. Now select "Start" to run software update (refer to picture 3).

Picture 3

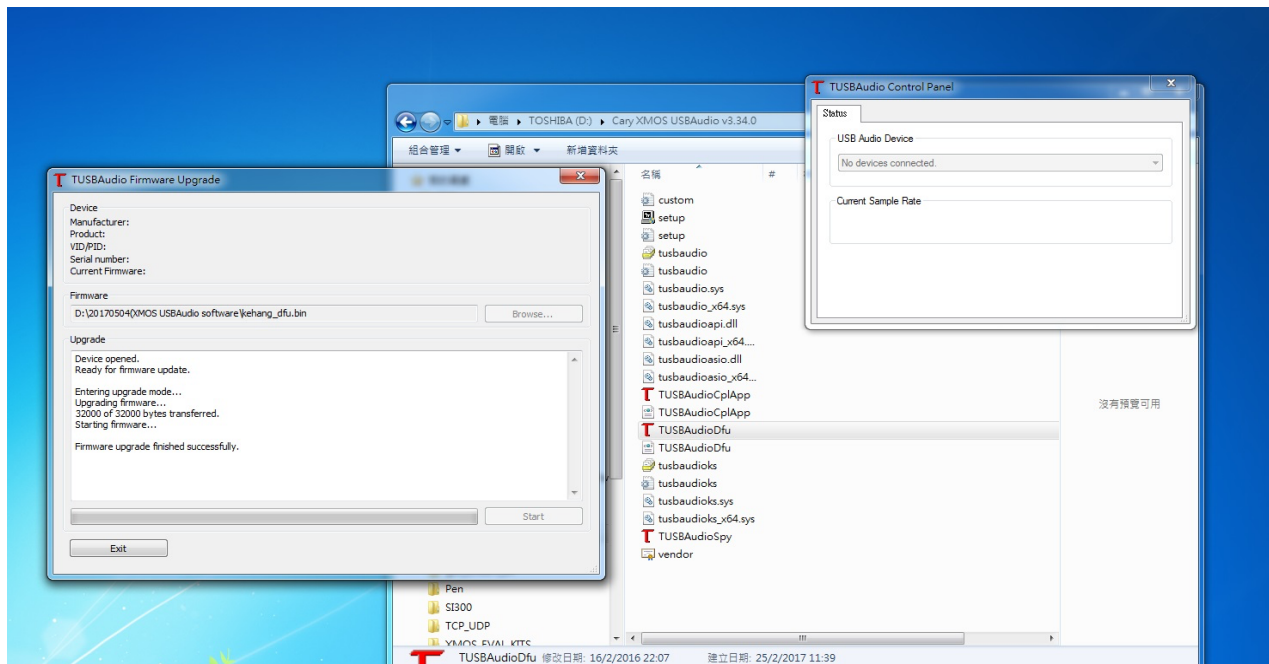

8. You should then see "Firmware upgrade finished successfully" (refer to picture 3). Unplug the USB cable.
9. Once your USB chip is updated will need to install XMOS USBAudio driver v3.40.40 on your PC and test your system out.
10. Open the folder containing Driver v3.40.0. Double click on the "Setup" file to install the driver. Once complete and with your equipment connected with the USB cable open the Playback Devices USBAudio Control Panel and check that the Device is available, just like in picture 1 and 2.
11. Now you will need to go into your software player program output and select the new driver. The device name is xCORE USB Audio 2.0 and is driver v3.40.0. Play some music!
12. Complete.