





OWNER'S MANUAL

CAI 1

Full Balanced Integrated Amplifier

NOTE: Before installing your new component, please read this manual carefully as it will inform you of the product specifications, proper installation and correct operating procedures for your unit. Also included in this manual are guidelines on how to service and care for your new Cary Audio Design product.

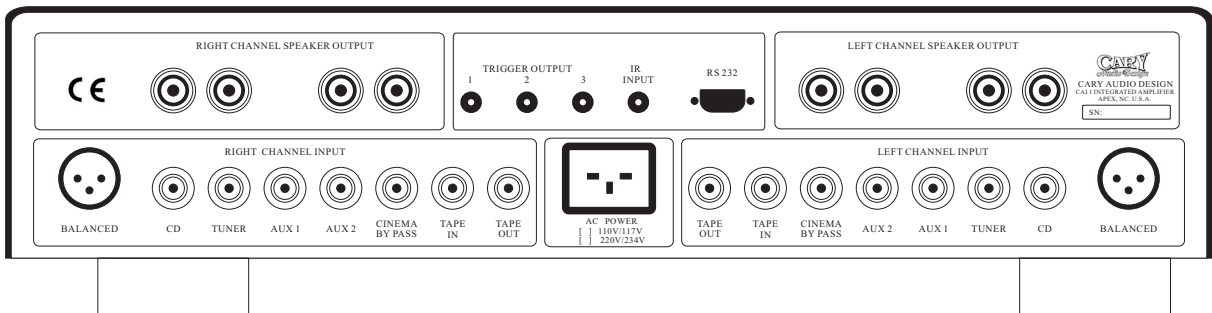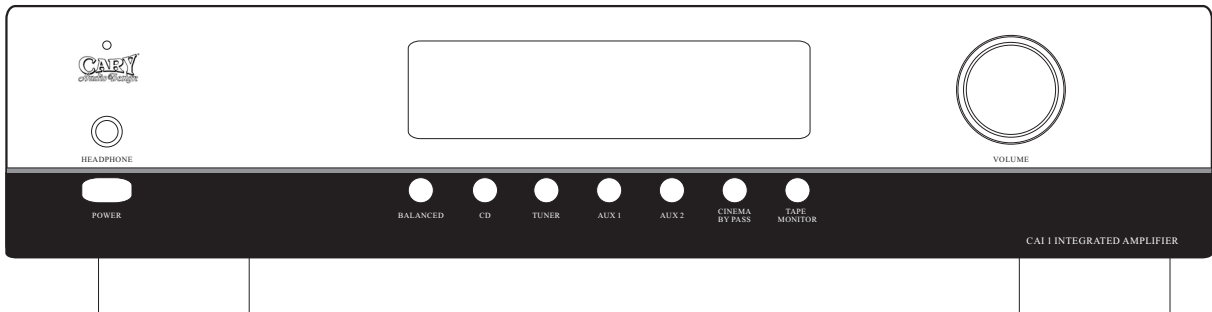

Front Panel, Remote Control & Rear Panel	4-7
Specifications	8
Installation	9
Operation	10
Service and Care	11
Warranty	12

IMPORTANT SAFETY INSTRUCTIONS

WARNING: To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture. The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of un-insulated dangerous voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



CAUTION: To reduce the risk of electric shock, do not remove the cover. There are no user serviceable parts inside. Please refer to qualified personnel for service.

ALERT: The exclamation point within an equilateral triangle is intended to alert the user of the presence of important operating and maintenance (servicing) instructions in the literature accompanying the component.

1. **READ ALL INSTRUCTIONS:** All the safety and operating instructions of your Cary Audio equipment should be read before power is applied to the equipment.
2. **RETAIN OWNER'S MANUAL:** These safety and operating instructions should be retained for future reference.
3. **HEED WARNING:** All warnings on the unit and in the operating instructions should be adhered to.
4. **FOLLOW INSTRUCTIONS:** All operating and use instructions should be followed.
5. **CLEANING:** Unplug the unit from the wall outlet before cleaning. The unit should be cleaned only as recommended by the manufacturer.
6. **ATTACHMENTS:** **Do not** use attachments not recommended by the unit manufacturer as they may cause hazards.
7. **WATER AND MOISTURE:** **Do not** use the unit near water - for example, near a bath tub, wash bowl, kitchen sink, or laundry tub; in a wet basement; or near a swimming pool.
8. **ACCESSORIES:** **Do not** place the unit on an unstable cart, stand, tripod, bracket, or table. The unit may fall, causing serious injury to a child, an adult, or damage to the unit. Mounting of the unit should follow the manufacturer's instructions and should use a mounting accessory recommended by the manufacturer.
9. **VENTILATION:** Slots and openings in the cabinet are provided for ventilation to ensure reliable operation of the unit and to protect it from overheating. These openings must not be blocked or covered. The top or bottom panel openings should never be blocked by placing the unit on a bed, sofa, rug, or other similar surface. The unit should not be installed in a built-in location such as a bookcase or rack unless proper ventilation is provided. There should be free space of at least 6 inches (16cm) above the unit and an opening behind the unit.
10. **GROUNDING OR POLARIZATION:** The unit may be equipped with a polarized alternating current line plug (a plug having one blade wider than the other). This plug will fit into the power outlet only one way. This is a safety feature. If you cannot insert the plug fully into the outlet, try reversing the plug. If the plug should fail to fit, contact a licensed electrician to replace your obsolete outlet. Do not defeat the safety purpose of the polarized plug.
11. **POWER SOURCES:** The unit should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supplied to your home, consult your unit dealer or local power company.
12. **POWER CORD PROTECTION:** Power supply cords should be routed so that they are unlikely to be walked on or pinched by items placed on or against them. Pay close attention to cords where they enter a plug, or a convenience receptacle, and the point where they exit from the unit.
13. **OUTDOOR ANTENNA GROUNDING:** If an outside antenna or cable system is connected to the unit, be sure the antenna or cable system is grounded so as to provide protection against voltage surges and built-up static charges. Article 810 of the National Electrical Code, NSI/NFPA 70, provides information regarding proper grounding of the mast and supporting structure, grounding of the lead-in wire to an Antenna-discharge unit, size of grounding conductors, location of antenna-discharge unit, connection to grounding electrodes, and requirements for the grounding electrode.

IMPORTANT SAFETY INSTRUCTIONS

14. **LIGHTNING:** For added protection for the unit during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet and disconnect the antenna or cable system. This will prevent damage to the unit due to lightning and power line surges.
15. **POWER LINES:** An outside antenna system should not be located in the vicinity of overhead power lines or other electric light or power circuits, or where it can fall into such power lines or circuits. When installing an outside antenna system, take extreme care to keep from touching such power lines or circuits as contact with them might be fatal.
16. **OVERLOADING:** Do not overload wall outlets, extension cords, or integral convenience receptacles as this can result in a risk of fire or electric shock.
17. **OBJECT AND LIQUID ENTRY:** Never push objects of any kind into the unit through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Never spill liquid of any kind on the unit.
18. **SERVICING:** Do not attempt to service the unit yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.
19. **REPLACEMENT PARTS:** When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer or have the same characteristics as the original part. Unauthorized substitutions may result in fire, electric shock or other hazards.
20. **SAFETY CHECK:** Upon completion of any service or repairs to the unit, ask the service technician to perform safety checks to determine that the unit is in proper operating condition.
21. **WALL OR CEILING MOUNTING:** The unit should be mounted to a wall or ceiling only as recommended by the manufacturer.
22. **HEAT:** The unit should be situated away from heat sources such as radiators, heat registers, stoves, or other units (including amplifiers) that produce heat.
23. **IMPORTANT SAFETY NOTE:** Before connecting a new component such as the DVD 7 to your audio or home theater system it is always good practice to make certain that all components are turned off, and preferably unplugged from their AC power source. Many modern electronics products feature automatic turn-on circuits that may be activated during an installation, causing the potential for damage to electronic components and/or speakers. Such damage is not covered by product warranties and Cary Audio specifically disclaims responsibility for any such damage.

Power Cord: The removable power cord that is shipped with the player is specifically designed to be used with this product. Other AC cords may be used, so consult your dealer for advice on AC power cords and high quality wire in your system.



AC Fuse: The fuse is located inside the chassis and is not user serviceable. If power does not come on, contact your authorized service representative.

Wiring: Cables that run inside of walls should have the appropriate markings to indicate compliance with, and listing by the UL, CSA or other standards required by the UL, CSA, NEC or your local building code. Questions about cables inside of walls should be referred to a qualified custom installer, or a licensed electrician or low-voltage contractor.

Do Not Open the Cabinet: There are no user serviceable components inside this product. Opening the cabinet may present a shock hazard, and any modification to the product will void your warranty. If water or any metal object, such as a paper clip, coin, or staple accidentally falls inside the unit, disconnect it from the AC power source immediately and contact Cary Audio for further instructions.

24. **RECORDING COPYRIGHT:** Recording of copyrighted material for other than personal use is illegal without permission of the copyright holder.
25. **NOTE TO CATV SYSTEM INSTALLER:** This reminder is provided to call the CATV system installer's attention to article 820-40 of the NEC, ANSI/NFPA 70, which provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

IMPORTANT SAFETY INSTRUCTIONS

26. FCC INFORMATION FOR USER:

CAUTION: ANY changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules.


These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from where the receiver is connected.

27. OUTDOOR ANTENNA INSTALLATION/SAFE ANTENNA AND CABLE CONNECTION:


If an outside antenna or cable system is connected to the equipment, be sure the antenna or cable system is grounded so as to provide protection against built up static charges and voltage surges, Section 810 of the national Electrical Code, ANSI/NFP A70 (in Canada, part 1 of the Canadian Electrical Code) provides information with respect to proper grounding of the mast and supporting structure, grounding of the lead-in wire to an antenna discharge unit, size of grounding conductors, location of antenna discharge unit, connection to grounding electrodes and requirements for the grounding electrode.

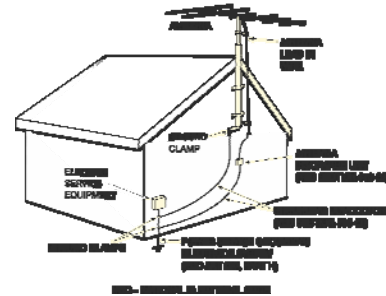

Keep Antenna Clear of High Voltage Power Lines or Circuits

An outside antenna system should be located well away from power lines, electric light or power circuits and where it will never come into contact with these power sources if it should happen to fall. When installing an outside antenna, extreme care should be taken to avoid touching power lines, circuits or other power sources as this could be fatal. Because of the hazards involved, antenna installation should be left to a professional.

Front Panel

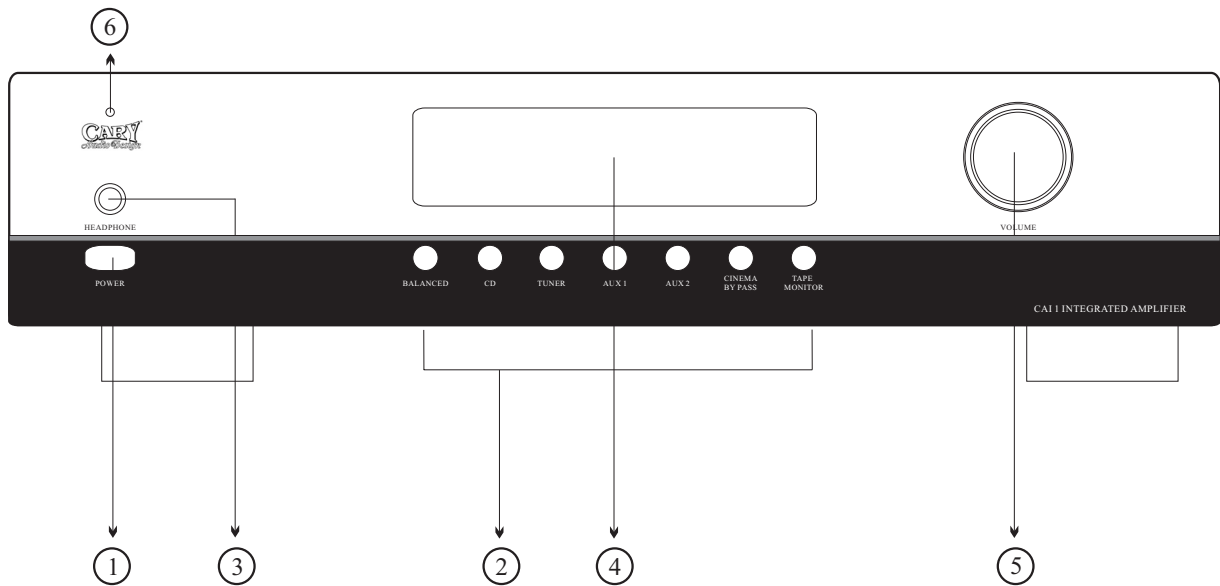

① POWER button:

- * Press once to turn the power ON.
- * Press again to set to the "OFF" position and turn the power off. The amplifier will enter "Standby" and the blue LED will light.

② SOURCE SELECTOR buttons:

- * Inputs source are selected by pressing their respective buttons.

③ HEADPHONE jack:

- * This jack is used to listen to headphones.
- * The SPEAKER output is turned off when headphones are plugged in.

④ ALPHANUMERIC DISPLAY:

- * This thirteen-character display provides a wide range of information concerning the operation of the CAI 1. The information displayed depends on what the CAI 1 is doing.
- * The information displayed is summarized below:
 - Normal Operation: Displays the selected (audible) input name and volume setting
 - Balance Mode: This shows the direction (L or R) and magnitude of the balance offset


⑤ VOLUME knob:

- * This control is used to adjust the listening volume.

⑥ POWER indicator (Standby):

- * This indicator lights when the amplifier is switched off.

Remote Control

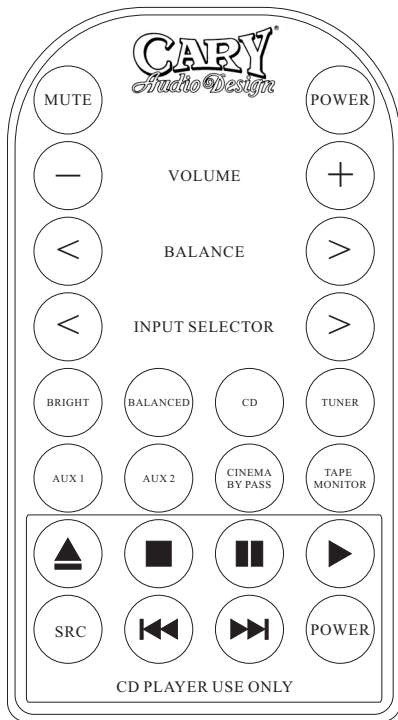

This button switches the power on and off.



This button mutes the sound.
Press again to resume sound.



VOLUME

Use the two buttons to adjust the volume of the CAI 1 from Volume 0 to Volume 63.



BALANCE

Use the two buttons to fine-tune the relative balance of the Left and Right channel from your listening position using the VOLUME buttons, in 1dB increments.



Use this button to cycle among four levels of brightness (including "OFF") for the display, allowing adjustment for various ambient lighting conditions.




INPUT SELECTOR

Use the two buttons for remote selection of the various inputs of the CAI 1.



Inputs source are selected by pressing their respective buttons.

Rear Panel

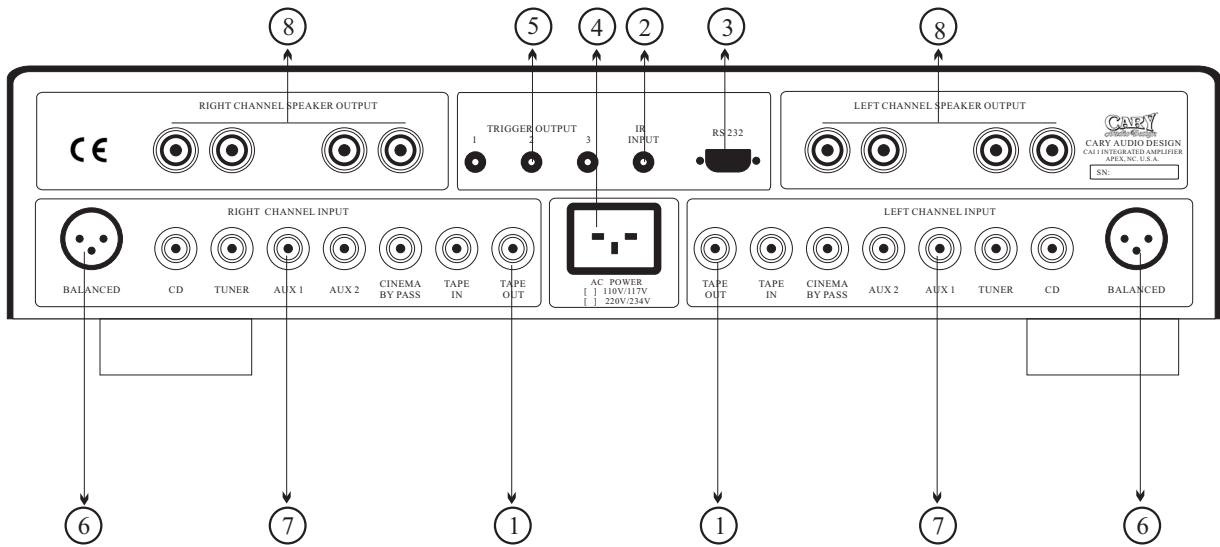

① ANALOG RECORD OUTPUT JACK (RCA UNBALANCED):

* Use these jacks for connection to the right-channel and left-channel tape inputs of your recorder.

② IR INPUT JACK:

* Use this jack to connect external IR sensors.

③ RS-232 PORT:

* The RS-232 port is used in conjunction with an external controller to control the operation of the CAI 1. (This is for custom installation use. Consult your dealer for more information.)

④ POWER INPUT (AC IN):

* Connect to an AC power supply using the included power supply cord.

⑤ DC TRIGGER OUTPUT TERMINALS:

* Connect a device that needs to be triggered by DC + 12V.(CD player...)

Rear Panel

⑥ BALANCED INPUTS:

- * Accepts right-channel and left-channel balanced signals from source equipment with balanced outputs.
- * The pin assignments of these XLR-type female input are:



- Pin 1: Signal ground
- Pin 2: Signal + (non-inverting)
- Pin 3: Signal - (inverting)
- Connector ground lug: chassis ground

Refer to the operating manuals of your balanced-output line-level sources to verify that the pin assignments of their output connectors correspond to the CAI 1. If not, wire the cable so that the appropriate output pin connects to the equivalent input pin.

⑦ SINGLE-ENDED INPUTS:

- * Accepts right-channel and left-channel (RCA) inputs from line-level source equipment such as tuners, CD player, and SACD player.

⑧ LOUDSPEAKER BINDING POSTS (OUTPUTS):

- * Provides audio output. Two pairs of custom-made, high-current binding posts labeled + (positive) and - (negative) are included.
- * These binding posts are designed to facilitate high pressure, high contact area connections without the use of tools such as nut drivers. A simple finger-tightening actually yields higher contact pressure than traditional hex binding posts. There is no need to exert unusual effort when tightening.
- * **CAUTION!**
NEVER connect power amplifier outputs to any component other than a loudspeaker.
NEVER short-circuit power amplifier outputs.
NEVER connect power amplifier outputs to another power amplifier's outputs.

DO NOT OVERTIGHTEN the CAI 1 binding posts. Tight, high-contact pressure connections can be achieved with finger-tightening.

DO NOT FORCE the CAI 1 binding post "wings" up and over a bent or oversized connector. Doing so may result in binding post damage. If the connector obstructs the "wing"-turning, slide it into place when the binding post opening provides a snug fit. Then, use quarter-turns to tighten the connection as needed.

Specifications

Operating the CAI 1 Integrated Amplifier is a simple procedure, since each unit is designed for long term stability in virtually any home operating situation. However, if the unit is operated outside the parameters outline in this owner's manual, damage may result. Please read this manual carefully before putting your new Cary Audio Design CAI 1 in operation.

1.1 Specifications

The following section describes the CAI 1 Integrated Amplifier basic specifications. Specifications are subject to change without notice or obligation.

Preamplifier Inputs	1 pair XLR connections 6 pair RCA connections
Input Sensitivity	1.2V (full-rated output)
Record Output	1 pair record output RCA connections
Controller Connectors	1 IEC AC mains receptacle 1 - 3.5mm "mini plug" jack for IR input 3 - 3.5mm "mini plug" jack for trigger out RS232 full remote configuration interface
Volume Control Range	63.0 dB
Input Impedance	100 k Ω RCA inputs 200 k Ω XLR inputs
Output Impedance	4 ~ 8 Ω
Rated Power Output	100 Watts per channel RMS. at 8 Ω 200 Watts per channel RMS. at 4 Ω
Rated Total Harmonic Distortion	0.0005% 10 W, 4 Ω 14 kHz/15 kHz
THD + N	0.006% @1 W, 8 Ω 1 kHz <0.2%, 0.1 W~200 W, 4 Ω
Frequency Response	\pm 0.5 dB from 20 Hz to 22 kHz
Signal-to-Noise Ratio	-80 dB CCIR
Voltage Gain	26.8 dB
Damping Factor	>4000, 100 Hz 8 Ω
Power Input	Configured at the factory for either 110-117 or 220-234 V AC, 50-60 Hz
Power Consumption	20 Watts at idle; 5 Watts in standby, 400 Watts at full power

Installation

This section describes the unpacking and installation procedures for the CAI 1 Integrated Amplifier.

WARNING

MAKE NO ATTEMPT TO PUT THE CAI 1 INTEGRATED AMPLIFIER IN SERVICE WITH THE TOP COVER REMOVED. CONTACT WITH HIGH VOLTAGE INSIDE THE CAI 1 INTEGRATED AMPLIFIER CAN BE FATAL!

2.1 Unpacking

All Cary Audio Design shipping containers have been specifically designed to protect their contents and special care has been taken to prevent damage under normal shipping conditions.

Mishandling should be evident upon inspection of the shipping container. If the CAI 1 Integrated Amplifier mechanism or other damage is found after unpacking and visual inspection, take care not to destroy the evidence so that the shipping agent may inspect the damage. If necessary, document the damage with photographs and contact the shipping company immediately.

Carefully remove your CAI 1 Integrated Amplifier from its packing carton and examine it closely for signs of shipping damage. It is highly recommended to save all original packing cartons to protect your CAI 1 from damage should you wish to store it or ship it for after-sales service. Replacement cartons and packing are available at a nominal charge from Cary Audio Design, if ever required.

2.2 Placement

In general, the location of your new CAI 1 is not critical. However, certain precautions must be taken to ensure optimum performance. Avoid extremely hot locations such as near radiators or other heating units. Avoid getting it wet or using it near water. Do not stack the CAI 1 on top of a power amplifier. Allow 4-6 inches (10-15cm) above the unit for proper ventilation.

2.3 Power Requirement

The CAI 1 Integrated Amplifier is designed to operate from AC mains current. The design AC voltage is either 110-117 V or 220-234 V AC at 50-60 Hz.


2.4 Connections

- | | |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Balanced Inputs: | Accepts right-channel and left-channel balanced signals from source component with balanced outputs. |
| Single-ended Inputs: | Accepts right-channel and left-channel (single-ended) inputs from source component. |
| Loudspeaker Binding Posts (outputs) | Connect + (positive) binding post on the CAI 1 to positive inputs on the associated loudspeaker.
Connect - (negative) binding post on the CAI 1 to negative inputs on the associated loudspeaker. |

Operation

3.1 Checking Connections:

- * Make sure that all the connections are proper by referring to the rear panel.
- * Check the polarity (positive and negative) of connections, and the directivity of stereo separation (right channel to right channel, left channel to left channel).
- * Check the directivity of pin cord connection.

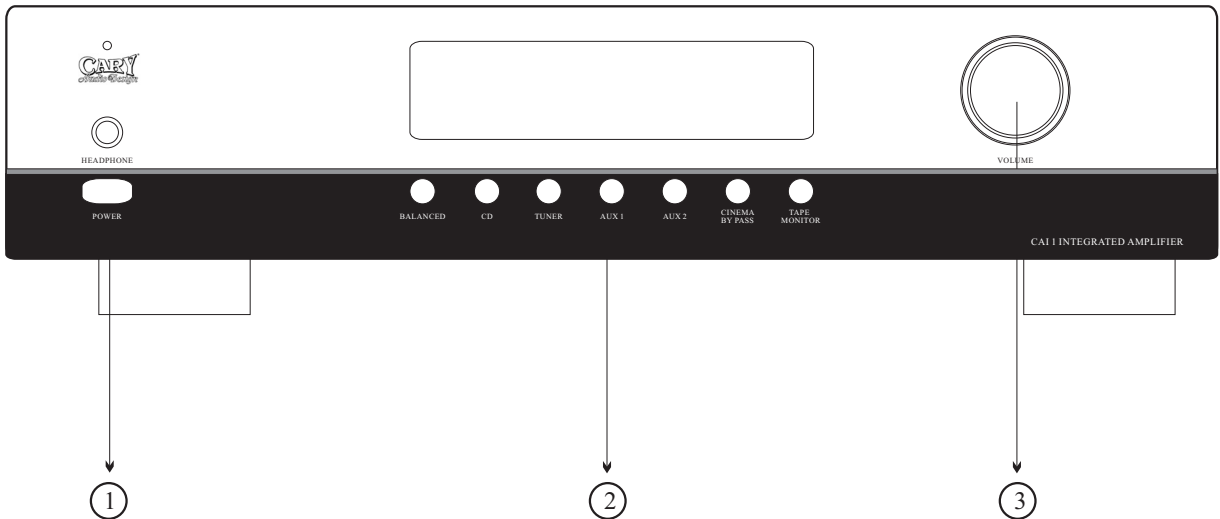

① POWER button:

- * Press once to turn the power ON.
- * Press again to set to the "OFF" position and turn the power off. The amplifier will enter into Standby and the blue LED will light.

② SOURCE SELECT buttons:

- * Press once to select the desired input source.

③ VOLUME knob:

- * Turn the volume knob to the desired listening level.

④ BREAKING -IN your CAI 1:

- * The CAI 1 requires at least 100 hours of continuous operation after it is first turned on to sound its best. This gives the materials in various circuit components a chance to "form" so audio signals achieve greater definition, smoothness and transparency.

Although the unit will sound spectacular when you first operate it, you will find it worthwhile to listen again after a few days and you'll discover details in your music you may not have guessed were there.

Service and Care

4.1 CAI 1 Care and Cleaning

The cabinet housing and front panel of the CAI 1 may be cleaned with a soft cloth and Windex® or a mild window cleaner. The frequency of cleaning will be governed by the operating environment cleanliness. Do not use benzene, harsh or abrasive chemicals to clean the front or rear panel as they may remove or damage the labels.

4.2 Factory Service

Careful consideration has been given to the design of you CAI 1 Integrated Amplifier to keep maintenance problems to a minimum. Any service problems should be referred to our Customer Service Department phone number (919) 355-0010 from 1-5 PM US East Coast Time Zone. Do NOT return the CAI 1 to the factory without a return authorization number (**RA**) from the Customer Service Department.

Cary Audio Design will assume no responsibility if the shipping company refuses to pay damage due to your improper packing or lack of insurance should the unit be lost or damaged in shipment. Please retain and always use the original shipping carton for the CAI 1 in the event that you move or after service is needed.

CAUTIONS

NEVER REMOVE OR INSERT THE BACK PANEL AC PLUG WHEN THE UNIT IS ON OR THE AC CORD IS PLUGGED INTO THE WALL.

PLEASE OBSERVE THE SAFETY DIRECTIONS IN THIS MANUAL

UNITED STATES LIMITED WARRANTY

Cary Audio Design warrants to the original United States purchaser for use in the United States that Cary Audio Design vacuum tube or solid state power amplifiers, surround sound processors or preamplifiers shall be free from defects in parts or workmanship for three (3) years from the date of the original purchase. Vacuum tubes, if any are used in the component, are offered a 90 day from purchase date exchange policy against defects with the exception of the CAVT 300B vacuum tube which has a (1) one year from purchase date exchange policy. Any digital drive design, whether a Cary Audio Design CD or SACD player or a Cary Cinema DVD player, has a limited one year parts and labor warranty against defects in manufacture. This is a limited warrant, for the original purchaser only and does not transfer to any subsequent owner.

During the limited warranty period, Cary Audio Design or an authorized Cary Audio Design service facility will provide free of charge both parts and labor necessary to correct any defects in material or workmanship.

To obtain such warranty service, the original purchaser must:

1. Complete and send in the warranty Registration Card within 15 days of purchase.
2. If claiming service the owner must send a fully filled in copy of the original sales receipt along with any unit sent in for service showing the AUTHORIZED CARY AUDIO DESIGN DEALER'S name, the new selling price, the buyer's name, e-mail or phone number and address on the receipt. Blank receipts will NOT validate the limited warranty for service.
3. Notify Cary Audio Design as soon as possible after the discovery of a possible defect and submit the following information to determine eligibility for warranty:
 - (a) The model number and serial number;
 - (b) A fully filled in copy of the original sales receipt showing the original selling price, purchasers name and address filled in by an AUTHORIZED CARY AUDIO DESIGN DEALER with the original date of purchase shown on the form;
 - (c) a detailed description of the problem.
4. Deliver the product to Cary Audio Design or the nearest authorized service facility or ship with all freight and insurance charges prepaid, in its original packing container or equivalent, to Cary Audio.

Correct maintenance, repair and use are important to obtain performance from this product. Therefore, please carefully read the Operating Manual. This warranty does not apply to any defect that Cary Audio Design in its sole discretion determines is due to:

1. Improper maintenance or repair, including the installation of parts or accessories that do not conform to the quality and the specifications of the original parts.
2. Misuse, abuse, neglect or improper installation.
3. Accidental or incidental damage.

WARRANTY DISCLAIMER

Except for the express warranties stated herein, Cary Audio Design disclaims all other warranties including, without limitation, all implied warranties of merchantability and fitness for a particular purpose. The foregoing constitutes Cary Audio Design's entire obligation with respect to this product, and the original purchaser and any user or owner shall have no other claim for incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation and exclusion may not apply to you. This warranty gives legal rights and you may also have other rights, which vary from state to state.

EXCLUSIVE REMEDY

Notwithstanding the foregoing, the purchaser's exclusive remedy for any breach of warranty, express or implied, is limited to the repair or replacement of the defective unit or the refund of the purchase price, at the option of Cary Audio Design. Under no circumstances is Cary Audio Design liable for incidental or consequential damages. Any implied warranties imposed by law terminate one (1) year from the date of purchase.

INTERNATIONAL PURCHASERS (Export markets)

Cary Audio Design warrants its merchandise to purchasers within the United States exclusively for use within the United States of America. It provides no other warranties, expressed or implied. If you are living outside the USA, please consult with your local dealer or distributor to determine the details of your local warranty.

CARY AUDIO DESIGN

1020 Goodworth Drive, Apex, NC 27539
phone 919-355-0010
fax 919-355-0013
www.caryaudio.com

